

**Catalytic - High Activated Carbon (CAT-HAC) may be used for a variety of water treatment applications including the reduction of chloramines and hydrogen sulfide from potable water.**

# Catalytic-High Activated Carbon (CAT-HAC)



Clack Catalytic Activated Carbon is a high activity coconut shell based granular carbon that is specifically designed for the reduction of chloramines and hydrogen sulfide from potable water.

Manufactured from select grades of coconut shell coal to produce a high density, durable granular product capable of withstanding the abrasion and dynamics associated with repeated hydraulic transport, backwashing and mechanical handling. Activation is carefully controlled to produce exceptionally high internal surface area with optimum pore size for the adsorption of a broad range of low molecular weight organic contaminants and oxidizing agents like chlorine and ozone.

The catalytic activity of CAT-HAC makes it highly effective for the reduction of chloramines and hydrogen sulfide from potable water. Its large micropore volume also makes it particularly well suited for the removal of low molecular weight organic compounds and their chlorinated by-products such as chloroform and other trihalomethanes (THMs).

To obtain maximum efficiency of the activated carbon in the adsorption process,

it is desirable to have the greatest possible surface area in the smallest practical volume. This is necessary because the rate of adsorption is proportional to the amount of surface area of the adsorbing media. CAT-HAC has a surface area of 1,060 square meters per gram. This results in high efficiency and greater system economy. Clack has for many years provided activated carbon to the OEM and replacement market as a pre-treatment for other water purification systems as well as for use in individual treatment equipment for the removal of specific impurities.

CAT-HAC requires dissolved oxygen concentration of 4ppm (mg/L) to insure effective removal of iron and hydrogen sulfide.

CAT-HAC requires periodic backwashing to eliminate accumulated suspended matter and to re-grade the filter bed. CAT-HAC has an extremely high capacity but must be replaced when the filter bed loses the capacity for reduction of chloramines and hydrogen sulfide. CAT-HAC may be used in either domestic or industrial applications using gravity flow or pressurized filter vessels.

## ADVANTAGES

- CAT-HAC is an outstanding coconut shell based material for applications requiring chloramine, hydrogen sulfide and dissolved organic compound reduction. This product can be used for filtering water having a wide range of pH levels.
- Large surface area results in an exceptionally high capacity and efficiency.
- Balanced pore structure gives a more efficient adsorption range.
- CAT-HAC is very durable so losses due to attrition are kept to a minimum.
- CAT-HAC has a very high carbon, low ash content.
- CAT-HAC will impart a high "polish" to the filtered water.

## PHYSICAL PROPERTIES

- Color: Black
- Mesh Size: 12 x 40
- Bulk Density: 28 lbs./cu. ft.
- Effective Size: 0.55-0.75 mm
- Ash Content: Max 4%
- Iodine Number: 1,000 mg/g
- Moisture as packed: Max 5%
- pH 10

## CERTIFICATIONS AND APPROVALS


- NSF/ANSI Standard 61
- AWWA B604-96
- EN12915

$$\text{Empty Bed Contact Time in Minutes} = \frac{\text{BedVolume (ft}^3\text{)} \times 7.481 \text{ gal/ft}^3}{\text{Flowrate (gpm)}}$$


## CONDITIONS FOR OPERATION

- Water to be filtered should preferably be free of oil and suspended matter
- The water to be filtered should be relatively free of turbidity for maximum service life
- Water pH range: wide range
- Bed depth: 26-30 in.
- Freeboard: 50% of bed depth (min.)
- Empty bed contact time 3 minutes minimum
- Dissolved Oxygen Concentration 4 ppm (mg/L)
- Service flow rate: 5 gpm/sq. ft.
- Backwash flow rate: 8-10 gpm/sq. ft.
- Backwash bed expansion: 30-40% of bed depth
- Upon installation, backwash to remove carbon fines before placing unit into service


### Service Flow Pressure Drop

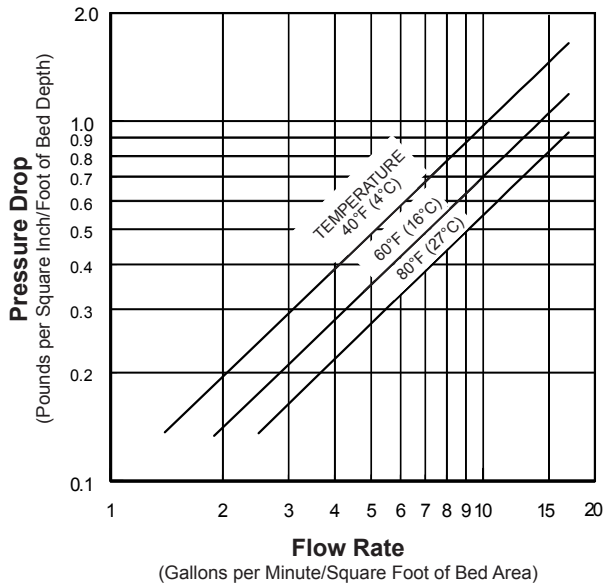

### Backwash Bed Expansion

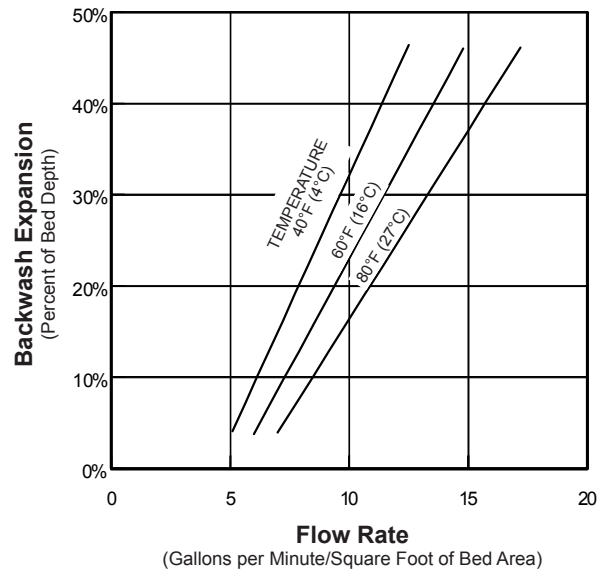

### Dechlorination of Water (pH 7, 21°C)

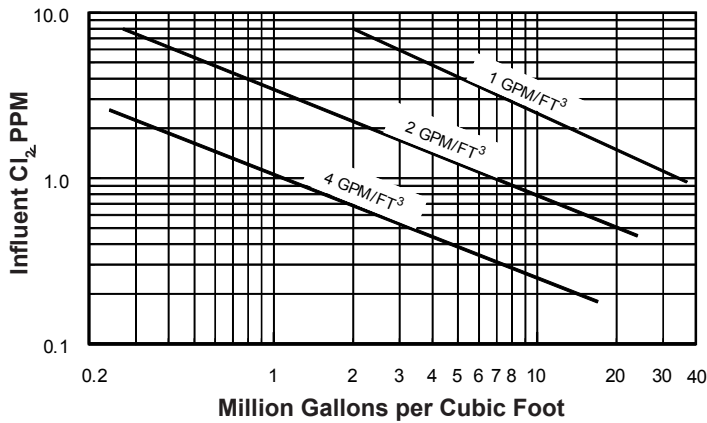

$$\text{Empty Bed Contact Time in Minutes} = \frac{\text{Bed Volume (ft}^3\text{)} \times 7.481 \text{ gal/ft}^3}{\text{Flowrate (gpm)}}$$



Certified to NSF/ANSI Standard 61

Catalytic - High Activated Carbon (CAT-HAC) is manufactured by Jacobi Carbons, Inc.

### ORDER INFORMATION

Part No.	Description	Cu. Ft./Bag	Wt./Cu. Ft.*	Bags/Pallet	Weight/Pallet	Pallet Dimensions
A8062	CAT-HAC 12x40 mesh	1	28 lbs.	40	1170 lbs.	39" x 45" x 44"

\*Weight per cubic foot is approximate.

CAT-HAC manufactured by Jacobi Carbons Inc. is made in Sri Lanka.

### NOT FOR INSTALLATION IN CALIFORNIA

The information and recommendations in this publication are based on data we believe to be reliable. They are offered in good faith, but do not imply any warranty or performance guarantee, as conditions and methods of use of our products are beyond our control. As such, Clack makes no express or implied warranties of any kind with respect to this product, including but not limited to any implied warranty of merchantability or fitness for a particular purpose. We recommend that the user determine whether the products and the information given are appropriate, and the suitability and performance of our products are appropriate, by testing with its own equipment. Specifications are subject to change without notice.

The information and recommendations given in this publication should not be understood as recommending the use of our products in violation of any patent or as a license to use any patents of the Clack Corporation.

The filter medias listed in this brochure do not remove or kill bacteria. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

Clack will not be liable under any circumstance for consequential or incidental damages, including but not limited to, lost profits resulting from the use of our products.